

The JBL logo is displayed in white on a black rectangular background in the top left corner. The letters 'JBL' are in a bold, sans-serif font, with a small registered trademark symbol (®) to the right.

STAGE3 SPEAKERS

A circular JBL Stage3 38F speaker with a black mesh grille and a central tweeter.

Stage3 38F

Stage3 58F

Stage3 68MF

Stage3 868F

A circular JBL Stage3 48 speaker with a black mesh grille and a central tweeter.

Stage3 48

Stage3 58CF

Stage3 68C

Stage3 968M

A circular JBL Stage3 48F speaker with a black mesh grille and a central tweeter.

Stage3 48F

Stage3 68

Stage3 68CF

Stage3 968MF

An oval JBL Stage3 58 speaker with a black mesh grille and a central tweeter.


Stage3 58

Stage3 68F


Stage3 648F

Stage3 968M

Dimensioni

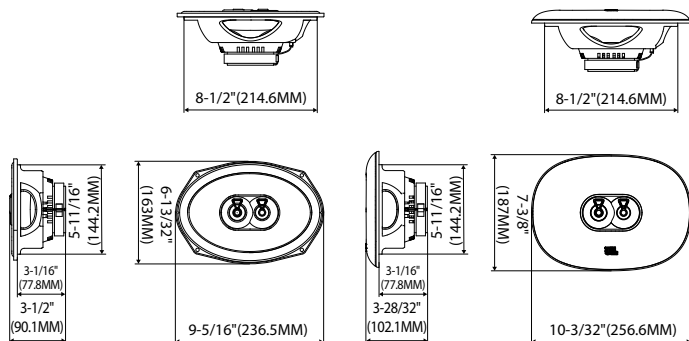


Installazione

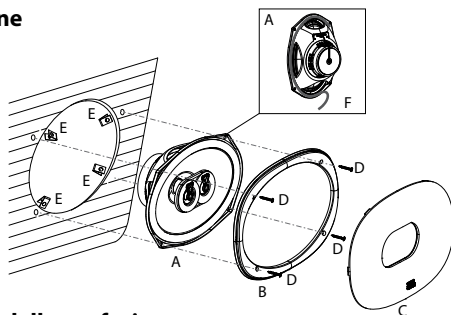

Contenuto della confezione

A	B	C	D	E	F	JBL	
2x	2x	2x	8x	8x	2x	2x	1x

Collegamento

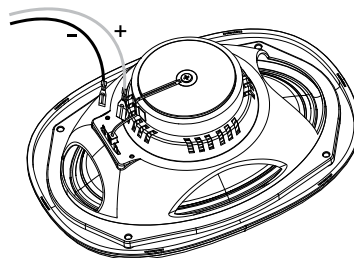

Specifiche

- Speaker: Speaker Car Audio 6"x9" (152x230mm) a tre vie con griglia
- Tenuta in Potenza: 80W RMS , 640W picco
- Sensibilità (@2,83V): 92dB
- Risposta in Frequenza: 40Hz – 20kHz
- Impedenza nominale: 4 ohm

Parametri Thiele-Small

- BL (Tm): 4.997
- DCR (Ohm): 3.33
- Mms (g): 24.042
- Sd (cm²): 261.59
- Cms (µm/N): 360
- Vas (L): 34.8348
- Fs (Hz): 54.1
- Qes: 1.091
- Qms: 10.256
- Qts: 0.986
- Punto di crossover: 4000Hz

*80W RMS: La potenza massima a lungo termine fa riferimento alla norma IEC 60268
40W RMS: Il test continuo di 100 ore alla potenza nominale fa riferimento alla norma IEC 60268